

# TOWMASTER®

AMERICA'S BEST TRAILER



## Description:

The T-3DT trailer is a pan type tilt deck and is designed for hauling small equipment and short loads of sand, rock or debris. The deck features a slip-resistant texture and 8-inch high sides. The low deck height is perfect for a low load angle and the slip-resistant deck assists in equipment loading. The T-3DT features a rubber-ride axle for a smooth ride, electric brakes, an adjustable hitch, and a positive locking (over-center) latch system to keep the deck secured to the frame.



## Quick Specs:

- Steel pan deck
- 14" deck height (empty)
- 54" between fenders
- 10' deck
- Electric brakes
- Dexter® Torflex® axle
- E-Z Lube hubs
- LED Lights and Sealed Wiring

Photos may show optional equipment.



Positive locking (over-center) latch system keeps deck secured to the frame.



Grommet mounted LED lights are standard.



Sealed battery break-away system charges while plugged into the tow vehicle and can be checked at the press of a button.

[towmaster.com](http://towmaster.com)

800-462-4517


U.S.A. BUILT EMPLOYEE OWNED



GALVANIZING AVAILABLE



Drop-Deck Pan Tilt  
T-3DT

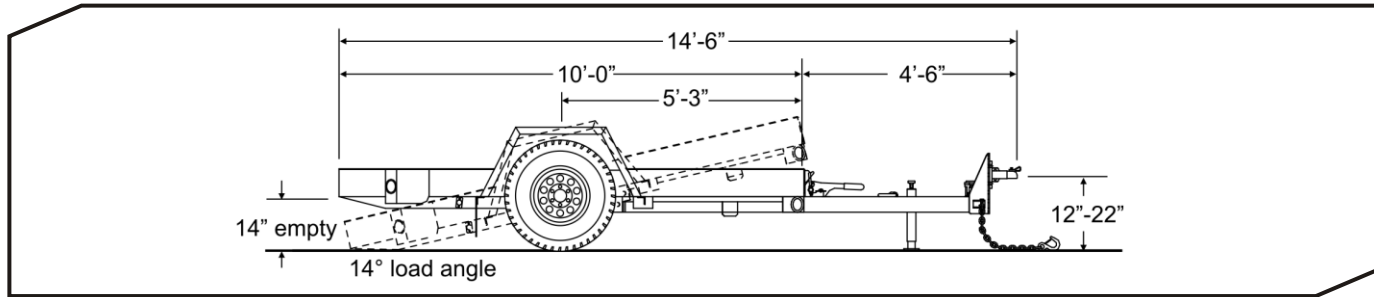

**SPECIFICATIONS**

S=Standard O=Optional

T-3DT

**CAPACITY / DIMENSIONS**

Payload Rating (lbs/kg)	3,500 / 1588			
GVWR (lbs/kg)	4,600 / 2086			
GAWR (lbs/kg)	3,500 / 1588			
Approx. Avg. Weight (lbs/kg)	1,100 / 499			
Overall Length (ft-in/mm)	14-6 / 4419			
Deck Height (empty)(in/mm)	14 / 355			
Overall Width (in/mm)	80 / 2032			
Load Width (in/mm)	54 / 1372			

**TONGUE**

Tongue Length 4'-6" (1372mm)	S			
Pintle Ring (in)	2.5			
Safety Chain	3/8" Grade 43			
Bolt-on Drop-Leg Parking Jack	5K			

**FRAME / RAMPS**

Main Beam	4 x 2 Tubing			
Crossmembers	3" Jr I-beam			
Headboard Height (in / mm)	8 / 204			
Deck	Steel Pan			
Deck Lip (in / mm)	8 / 204			
Deck Latch	Single Point			
Load Angle (degrees) – depending on deck length	14			
Tie Downs	D-ring			
Number of Tie-Downs (Total / Side)	6 / 3			

**SUSPENSION / TIRES**

Rubber-Ride Axle w/Warranty	S			
Axle Capacity (each) (lbs/kg)	3,500 / 1588			
Axle Spread (in/mm)	N/A			
Hubs	E-Z Lube			
Electric Brakes w/Forward Adjust	S			
Brake Size (in/mm)	10x2.25 / 250x57			
Battery Break-Away Kit with Tow Charger	S			
Wheels (in/mm)	15x6 / 381x152			
Wheel Bolt Pattern	6-bolt			
Tires / Load Range Rating	225/75R x 15 / D			

**STANDARD EQUIPMENT**

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- RV electrical plug
- Trailer color: Equipment black

**OPTIONAL EQUIPMENT**

Other options may be available  
See your dealer or visit our web site for details

- Hydraulic surge brakes
- 6-pole round electrical plug
- Oak wood deck
- Deck cushion cylinder
- Rubber runner pads
- Additional tie-downs
- Spare tire and wheel
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing

**U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN**

\*Listed GVWR and weights are for reference only. Weights can vary due to options installed.

All dimensions are approximate. Check our website or see your authorized dealer for more information.

Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer. Photos may not show most recent changes to models.