

TOWMASTER®

AMERICA'S BEST TRAILER



Description:

The T-5T is a pan type tilt-deck trailer designed for hauling small equipment. The deck features white oak wood and 7-inch high sides. The low deck height offers a shallow tilt angle that allows small equipment to easily climb the incline. For scissor lifts, an "SL" option adds ramps for an even lower load angle. The T-5T features a rubber-ride axle for a smooth ride, electric brakes, an adjustable hitch, and a positive locking (over-center) latch system to safely keep the deck secured to the frame.



Quick Specs:

- 2" nominal white oak deck
- 16.5" deck height (empty)
- 77" between fenders
- 12' and 14' deck lengths
- Electric brakes
- Dexter® Torflex® axle
- E-Z Lube hubs
- LED Lights and Sealed Wiring

Photos may show optional equipment.



Positive locking (over-center) latch system keeps deck secured to the frame.



Grommet mounted LED lights are standard.



The "SL" (Scissor Lift) option includes ramps to lower the loading incline.

towmaster.com

800-462-4517

U.S.A. BUILT EMPLOYEE OWNED




GALVANIZING AVAILABLE



Drop-Deck Pan Tilt T-5DT

T-5DT

AMERICA'S BEST TRAILER

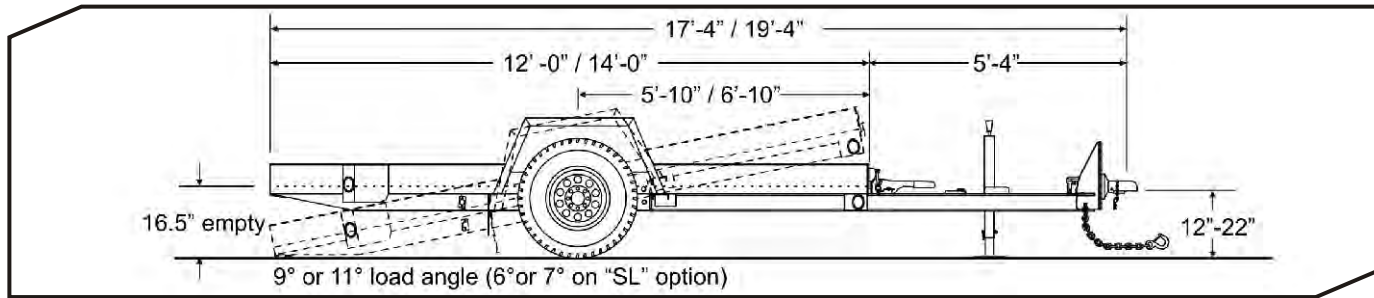

SPECIFICATIONS					
CAPACITY / DIMENSIONS		S=Standard O=Optional		T-5DT	
Payload Rating (lbs/kg)	5,000 / 2268				
GVWR (lbs/kg)	7,000 / 3175				
GAWR (lbs/kg)	7,000 / 3175				
Approx. Avg. Weight (lbs/kg)	2,000 / 907				
Overall Length (12'-0") (ft-in/mm)	17-4 / 5283				
Overall Length (14'-0") (ft-in/mm)	19-4 / 5893				
Deck Height (empty)(in/mm)	16.5 / 419				
Overall Width (ft-in/mm)	8-6 / 2591				
Load Width (in/mm)	77 / 1956				
TONGUE					
Tongue Length (ft-in/mm)	5'-4" / 1626				
Pintle Ring (in)	2.5				
Safety Chain	3/8" Grade 43				
Bolt-on Drop-Leg Parking Jack	7K				
FRAME / RAMPS					
Main Beam	M4 x 13 beam				
Crossmembers	3" Jr I-beam				
Headboard Height (in / mm)	7 / 177				
Deck	Oak Wood				
Deck Lip (in / mm)	7 / 177				
Deck Latch	Single Point				
Load Angle (degrees) – depending on deck length	9, 11				
Tie Downs	D-ring				
Number of Tie-Downs (Total / Side)	6 / 3				
SUSPENSION / TIRES					
Rubber-Ride Axles w/Warranty	S				
Axle Capacity (each) (lbs/kg)	7,000 / 3175				
Axle Spread (in/mm)	N/A				
Hubs	E-Z Lube				
Electric Brakes w/Forward Adjust	S				
Brake Size (in/mm)	12x2 / 305x51				
Battery Break-Away Kit with Tow Charger	S				
Wheels (in/mm)	15x6 / 381x152				
Wheel Bolt Pattern	8-bolt				
Tires / Load Range Rating	225/75R x 15 / D				

STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- RV electrical plug
- Trailer color: Equipment black

OPTIONAL EQUIPMENT

Other options may be available
See your dealer or visit our web site for details

- Hydraulic surge brakes
- 3" pintle ring or 2-5/16" ball coupler
- Steel deck
- Deck cushion cylinder
- 6-pole round electrical plug
- Additional tie-downs
- Spare tire and wheel
- Tire upgrade, 235/85R16, 10-ply, load range E tires
- "SL" ramp option for hauling scissor lifts
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Listed GVWR and weights are for reference only. Weights can vary due to options installed.

All dimensions are approximate. Check our website or see your authorized dealer for more information.

Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer. Photos may not show most recent changes to models.