

TOWMASTER®

AMERICA'S BEST TRAILER



Description:

The Towmaster® drop-deck tilt trailers are popular with rental dealers and small contractors. There are no ramps to hassle with; simply tilt the deck and drive on or off. This trailer is built on our cold-formed I-beam tongue and main frame for tough durability. The tilt deck trailer features a single lever twin-latch system, knife-edge approach plate, rubber-ride axles and adjustable hitch. A deck cushion cylinder eases the deck back into transport position and prevents equipment from slamming the deck down.



Quick Specs:

- 2" nominal white oak deck
- 22.5" deck height (empty)
- 82" between fenders
- 14', 16', 18' cushioned deck
- Electric brakes with forward adjust
- Dexter® Torflex® axles
- E-Z Lube hubs
- Integrated knife-edge approach ramp
- LED Lights and Sealed Wiring

Photos may show optional equipment.



Cushion cylinder controls the deck from slamming when loading or unloading equipment.



Knife edge approach ramp allows easy equipment loading and unloading.



Single deck latch lever with dual latch security is easy to operate.

towmaster.com

800-462-4517

U.S.A. BUILT EMPLOYEE OWNED




GALVANIZING AVAILABLE



Drop-Deck Tilt
T-9DT / T-10DT / T-12DT

T-9DT / T-10DT / T-12DT

AMERICA'S BEST TRAILER

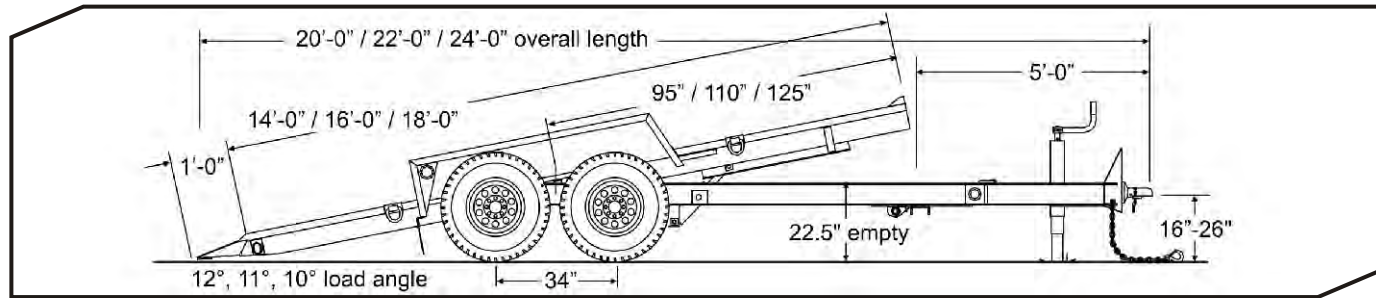

SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	T-9DT	T-10DT	T-12DT
Payload Rating (lbs/kg)	6,100 / 2766	10,000 / 4536	12,000 / 5443
GVWR (lbs/kg)	9,990 / 4531	13,900 / 6305	15,900 / 7212
GAWR (lbs/kg)	14,000 / 6350	14,000 / 6350	14,000 / 6350
Approx. Avg. Weight (lbs/kg)	3,900 / 1769	3,900 / 1769	3,900 / 1769
Overall Length – 14' (ft-in/mm)	20-0 / 6096	20-0 / 6096	20-0 / 6096
Overall Length – 16' (ft-in/mm)	22-0 / 6706	22-0 / 6706	22-0 / 6706
Overall Length – 18' (ft-in/mm)	24-0 / 7315	24-0 / 7315	24-0 / 7315
Deck Height (empty)(in/mm)	22.5 / 572	22.5 / 572	22.5 / 572
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591	8-6 / 2591
Load Width (in/mm)	82 / 2083	82 / 2083	82 / 2083
TONGUE			
Tongue Length 5'-0" (1524mm)	S	S	S
One-Piece Cold-Formed Tongue / Frame	S	S	S
Pintle Ring (in)	2.5	2.5	2.5
High-Tensile Safety Chain	3/8" Grade 43	3/8" Grade 43	3/8" Grade 43
Bolt-on Drop-Leg Parking Jack	12K	12K	12K
FRAME / RAMPS			
Main Beam	6" I-Beam	6" I-Beam	High Tensile W6 x 12
Crossmembers	3" Channel	3" Channel	3" Channel
Headboard Height (in / mm)	3 / 76	3 / 76	3 / 76
Deck	2" nom. White Oak	2" nom. White Oak	2" nom. White Oak
Deck Lip (in / mm)	2 / 51	2 / 51	2 / 51
Deck Latch	Dual-Point	Dual-Point	Dual-Point
Approach Ramp (in x in/mm)	12 / 305	12 / 305	12 / 305
Load Angle (degrees) – depending on deck length	10, 11, 12	10, 11, 12	10, 11, 12
Tie Downs	D-ring	D-ring	D-ring
Number of Tie-Downs (Total / Side)	8 / 4	8 / 4	8 / 4
SUSPENSION / TIRES			
Rubber-Ride Axles w/Warranty	S	S	S
Axle Capacity (each) (lbs/kg)	7,000 / 3175	7,000 / 3175	7,000 / 3175
Axle Spread (in/mm)	34 / 864	34 / 864	34 / 864
Hubs	E-Z Lube	E-Z Lube	E-Z Lube
Electric Brakes w/Forward Adjust	S	S	S
Brake Size (in/mm)	12x2 / 305x51	12x2 / 305x51	12x2 / 305x51
Battery Break-Away Kit with Tow Charger	S	S	S
Wheels (in/mm)	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152
Wheel Bolt Pattern	8-bolt	8-bolt	8-bolt
Tires / Load Range Rating	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E

STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- RV electrical plug
- Trailer color: Equipment black

OPTIONAL EQUIPMENT

Other options may be available
See your dealer or visit our web site for details

- Hydraulic surge brakes
- 3" pintle ring or 2-5/16" ball coupler
- 4-foot stationary deck
- Gooseneck hitch
- 6-pole round electrical plug
- Storage tray lid
- Pallet fork holders
- 8K electric winch
- Additional tie-downs
- Spare tire and wheel mount
- Spare tire and wheel
- "SL" ramp option for hauling scissor lifts
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Listed GVWR and weights are for reference only. Weights can vary due to options installed.

All dimensions are approximate. Check our website or see your authorized dealer for more information.

Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer. Photos may not show most recent changes to models.