

TOWMASTER®

AMERICA'S BEST TRAILER



Description:

The economical TC-18-3 is a great tri-axle trailer for mid-sized equipment. It's built on the Towmaster I-beam frame and features 3-inch I-beam crossmembers, 8'-6" wide oak wood deck, 5-foot angle-iron beavertail and 5-foot one-way spring assist ramps. Sealed wiring and grommet mounted incandescent lights are standard.



Quick Specs:

- 36" deck height (empty)
- 8'-6" wide white oak deck
- 20' deck
- 5' angle-iron beavertail
- D-ring tie-downs
- Electric brakes
- Torflex® axles
- One-way spring-assist ramps

Photos may show optional equipment.



Single-wheel tri-axle. 6K Dexter Torflex axles with rubber-ride suspension.



Angle-iron beavertail and ramps provide excellent traction for loading and unloading.



One-way spring-assist ramps and grommet mounted incandescent lights.

towmaster.com

800-462-4517

U.S.A. BUILT EMPLOYEE OWNED




GALVANIZING
AVAILABLE



Deck-Over
TC-18-3

TC-18-3

AMERICA'S BEST TRAILER

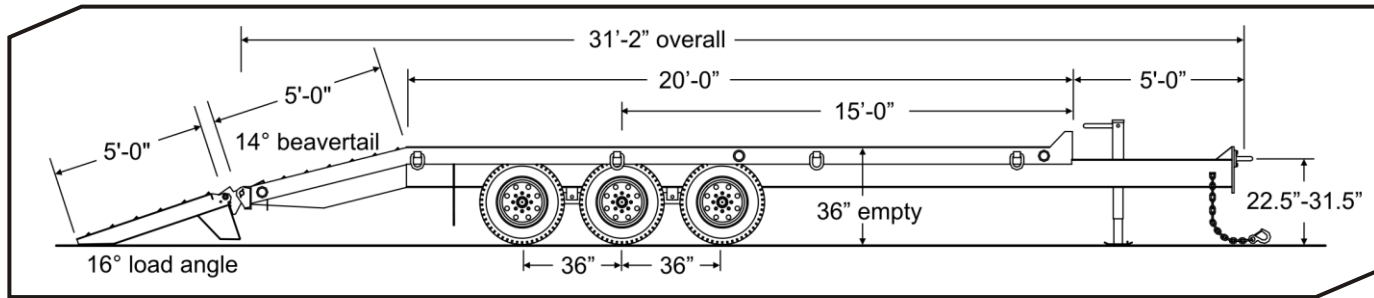

SPECIFICATIONS

S=Standard O=Optional

TC-18-3

CAPACITY / DIMENSIONS

Capacity Rating (lbs/kg)	18,000 / 8165			
GVWR (lbs/kg)	24,200 / 10,977			
GAWR (lbs/kg)	18,000 / 8165			
Approx. Weight (lbs/kg)	6,200 / 2812			
Deck Length (ft-in/mm)	20-0 / 6096			
Overall Length (ft-in/mm)	31-5 / 9576			
Deck Height (empty)(in/mm)	36 / 914			
Overall Width (ft-in/mm)	8-6 / 2591			

TONGUE

Tongue Length (ft-in/mm)	5-0 / 1524			
Storage Tray	S			
Storage Tray Lid	O			
Pintle Ring (in)	3"			
High-Tensile Safety Chain (size - in)	3/8 Grade 70			
Bolt-on Drop-Leg Parking Jack	12K			

FRAME / RAMPS

Main Beam	W10 x 17, Gr. 50			
One-Piece Cold-Formed Frame Rails	S			
Crossmembers	3" Jr I-beam			
Headboard (in/mm)	5.5 / 140			
Channel Side Rails (in/mm)	6 / 152			
Deck Material	2" nom. White Oak			
Tie Downs	D-rings			
Tie Downs (Total/Side)	8 / 4			
Beavertail (ft-in / mm) (angle-degrees)	5-0 / 1524 (14)			
Beavertail Type	Angle-Iron			
Ladder Style Ramps (ft-in x in/mm)	5-0 x 21 / 1524 x 533			
Off-the-Ground Spring Assist	S			

SUSPENSION / TIRES

Dexter Torflex Rubber Torsion Suspension	S			
No. of Axles	3			
Axle Capacity (each) (lbs/kg)	6,000 / 2722			
Axle Spread (in/mm)	34 / 864			
Hubs	Standard Lube			
Electric Brakes w/Forward Adjust	S			
Battery Break-Away Kit w/Tow Charger	S			
Brake Size (in/mm)	12x2 / 305x51			
Wheels (in/mm)	16x6 / 406x152			
Wheel Bolt Pattern	6-bolt			
Tires / Load Range Rating	235/85R x 16 / E			

STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted incandescent lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- DOT conspicuity tape
- Mud flaps
- Adjustable ramp width spacing
- RV electrical plug
- Trailer color: Equipment black
- Ramp color: Equipment red

OPTIONAL EQUIPMENT

Other options may be available
See your dealer or visit our web site for details

- 2-5/16" ball coupler
- Gooseneck hitch
- 6-pole round electrical plug
- Storage tray lid
- 8K electric winch
- Additional tie-downs
- E-Z Lube hubs
- Spare tire and wheel mount
- Spare tire and wheel
- Ramp lift springs
- Several ramp options available
- LED lights
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Listed GVWR and weights are for reference only. Weights can vary due to options installed.

All dimensions are approximate. Check our website or see your authorized dealer for more information.

Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer. Photos may not show most recent changes to models.