

# TOWMASTER®

AMERICA'S BEST TRAILER



## Description:

This small deck over equipment trailer is just the right size for hauling lighter, bulky equipment. The TC-series by Towmaster® features a 5-ft. wood-topped beavertail and 8 ft. wide deck. Dexter Torflex axles give this model a predictable, smooth ride. Our patented Auto-Latch® ramp hold-ups are standard and stake pockets provide a secure place for tying equipment. This model is designed for bigger sized small equipment that doesn't require the heavier weight rating of our larger deck-over trailers.

## Quick Specs:

- 36" deck height (empty)
- 8'-0" wide white oak deck
- 14', 16', 18', 20' deck (model specific)
- 5' Wood-topped beavertail
- Stake pockets
- Electric brakes
- Torflex® axles
- Auto-Latch® Ramps



Wood topped beavertail and Auto-Latch ramp hold-ups.



Stake pockets are standard on this model.



Rubber torsion axles provide a smooth ride.

Photos may show optional equipment.

[towmaster.com](http://towmaster.com)

800-462-4517

U.S.A. BUILT EMPLOYEE OWNED




GALVANIZING AVAILABLE



Deck-Over  
TC-9 / TC-10 / TC-12 / TC-14

# TC-9 / TC-10 / TC-12 / TC-14

AMERICA'S BEST TRAILER

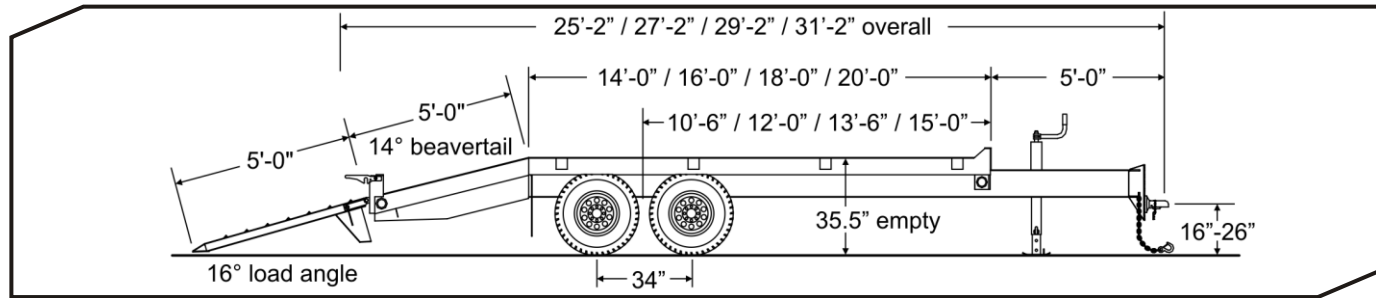

## SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	TC-9	TC-10	TC-12	TC-14
Capacity Rating (lbs/kg)	5,400 / 2449	10,000 / 10,866	12,000 / 5443	14,000 / 6350
GVWR (lbs/kg)	9,990 / 4531	14,600 / 6622	16,600 / 7529	18,800 / 8527
GAWR (lbs/kg)	12,000 / 5443	12,000 / 5443	12,000 / 5443	14,000 / 6350
Approx. Weight (lbs/kg)	4,600 / 2087	4,600 / 2087	4,600 / 2087	4,800 / 2177
Overall Length (14'-0"/4267mm)(ft-in/mm)	25-5 / 7747	25-5 / 7747	25-5 / 7747	25-5 / 7747
Overall Length (16'-0"/4877mm)(ft-in/mm)	27-5 / 8357	27-5 / 8357	27-5 / 8357	27-5 / 8357
Overall Length (18'-0"/5486mm)(ft-in/mm)	29-5 / 8966	29-5 / 8966	29-5 / 8966	29-5 / 8966
Overall Length (20'-0"/6096mm)(ft-in/mm)	31-5 / 9550	31-5 / 9550	31-5 / 9550	31-5 / 9550
Deck Height (empty)(in/mm)	35 / 889	35 / 889	35 / 889	35 / 889
Overall Width (ft-in/mm)	8-0 / 2438	8-0 / 2438	8-0 / 2438	8-0 / 2438
<b>TONGUE</b>				
Tongue Length (ft-in/mm)	5-0 / 1524	5-0 / 1524	5-0 / 1524	5-0 / 1524
Storage Tray	S	S	S	S
Storage Tray Lid	O	O	O	O
Pintle Ring (in)	3"	3"	3"	3"
High-Tensile Safety Chain (size - in)	3/8 Grade 43	3/8 Grade 43	3/8 Grade 43	3/8 Grade 43
Bolt-on Drop-Leg Parking Jack	12K	12K	12K	12K
<b>FRAME / RAMPS</b>				
Main Beam	W10 x 12, Gr. 50	W10 x 12, Gr. 50	W10 x 12, Gr. 50	W10 x 12, Gr. 50
One-Piece Cold-Formed Frame Rails	S	S	S	S
Crossmembers	3" Jr I-beam	3" Jr I-beam	3" Jr I-beam	3" Jr I-beam
Headboard (in/mm)	3.5 / 89	3.5 / 89	3.5 / 89	3.5 / 89
Channel Side Rails (in/mm)	6 / 152	6 / 152	6 / 152	6 / 152
Deck Material	2" nom. White Oak	2" nom. White Oak	2" nom. White Oak	2" nom. White Oak
Tie Downs	Stake Pockets	Stake Pockets	Stake Pockets	Stake Pockets
Tie Downs (Total/Side)	8 / 4	8 / 4	8 / 4	8 / 4
Beavertail (ft-in / mm) (angle-degrees)	5-0 / 1524 (14)	5-0 / 1524 (14)	5-0 / 1524 (14)	5-0 / 1524 (14)
Beavertail Type	Wood Topped	Wood Topped	Wood Topped	Wood Topped
Ladder Style Ramps (ft-in x in/mm)	5-0 x 21 / 1524 x 533	5-0 x 21 / 1524 x 533	5-0 x 21 / 1524 x 533	5-0 x 21 / 1524 x 533
Off-the-Ground Spring Assist	O	O	O	S
Auto-Latch Ramp Hold-Up	S	S	S	S
<b>SUSPENSION / TIRES</b>				
Dexter Torflex Rubber Torsion Suspension	S	S	S	S
No. of Axles	2	2	2	2
Axle Capacity (each) (lbs/kg)	6,000 / 2722	6,000 / 2722	6,000 / 2722	7,000 / 3175
Axle Spread (in/mm)	34 / 864	34 / 864	34 / 864	34 / 864
Hubs	Standard Lube	Standard Lube	Standard Lube	Standard Lube
Electric Brakes	S	S	S	S
Brake Size (in/mm)	12x2 / 305x51	12x2 / 305x51	12x2 / 305x51	12x2 / 305x51
Wheels (in/mm)	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152
Wheel Bolt Pattern	6-bolt	6-bolt	6-bolt	8-bolt
Tires / Load Range Rating	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E

## STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted incandescent lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- DOT conspicuity tape
- Mud flaps
- Adjustable ramp width spacing
- RV electrical plug
- Trailer color: Equipment black
- Ramp color: Equipment red

## OPTIONAL EQUIPMENT

Other options may be available  
See your dealer or visit our web site for details

- 2-5/16" ball coupler
- Gooseneck hitch
- 6-pole round electrical plug
- Storage tray lid
- 8K electric winch
- Additional tie-downs
- D-ring tie-downs
- E-Z Lube hubs
- Spare tire and wheel mount
- Spare tire and wheel
- Ramp lift springs
- Several ramp options available
- LED lights
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing

## U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Listed GVWR and weights are for reference only. Weights can vary due to options installed.

All dimensions are approximate. Check our website or see your authorized dealer for more information.

Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer. Photos may not show most recent changes to models.