

TOWMASTER®

AMERICA'S BEST TRAILER

Description:

The Towmaster® TE offers the essentials for a budget price, yet is built strong enough to be called a Towmaster. It works well for skid-loaders, mini-excavators and other small equipment and makes a great general duty trailer. The TE drop-deck is built with a solid 7-inch channel frame, 3-inch I-beam crossmembers, and pine wood deck. The rubber torsion axles offer independent suspension and a smooth, predictable ride. The TE is a budget trailer built with Towmaster's renowned quality.

Quick Specs:

- 2" nominal pine wood deck
- 7" channel frame
- 24" deck height (empty)
- 82" between fenders
- 16' or 18' deck
- Rubber torsion axles
- 7K parking jack
- Solid bar ramp hold-ups
- Grommet mounted incandescent lights



Go directly to our web site with your smart phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>

towmaster.com

800-462-4517

U.S.A. BUILT EMPLOYEE OWNED



Strong frame with heavy-duty headboard provide a strong and integral structure for the trailer.



Sealed battery break-away system charges while plugged into the tow vehicle and can be checked at the press of a button.



Heavy-duty tear-drop fenders with backing plate keeps tire debris off equipment.




Photos may show optional equipment.

Drop-Deck
TE-9D / TE-10D / TE-12D

TE-9D / TE-10D / TE-12D

AMERICA'S BEST TRAILER

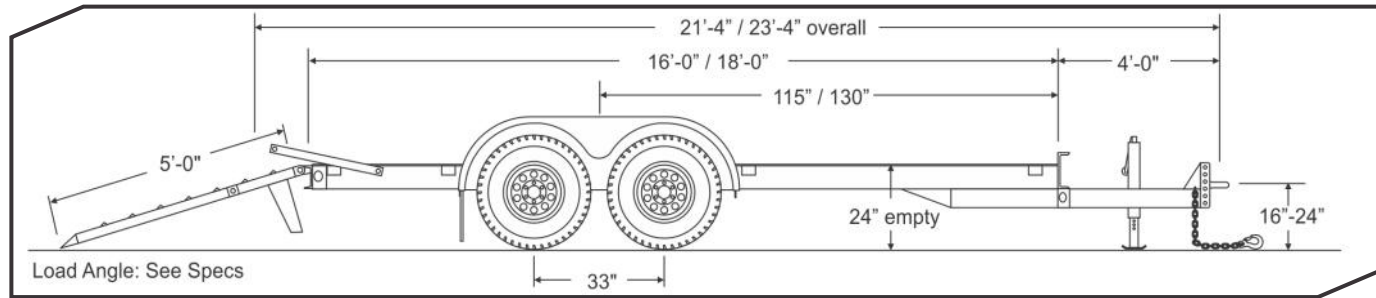

STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant wiring harness
- Grommet mounted incandescent lights
- Registration holder
- Rust inhibiting two-part polyurethane primer
- Durable, polyurethane top coat
- DOT conspicuity tape
- Mud flaps
- Adjustable ramp
- RV electrical plug
- Trailer color: Equipment black
- Ramp color: Equipment red
- Limited 3-year Frame Warranty
- Standard 1-year warranty

OPTIONAL EQUIPMENT

See your dealer or visit our web site for details


- Hydraulic surge brakes
- 2-5/16" ball coupler
- 6-pole round electrical plug
- Additional stake pockets
- Spare tire and wheel

SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	TE-9D	TE-10D	TE-12D
Approx. Payload (lbs/kg)	7,500 / 3402	10,000 / 4536	12,000 / 5443
GVWR (lbs/kg)	9,990 / 4531	12,500 / 5670	14,500 / 6577
GAWR (lbs/kg)	12,000 / 5443	12,000 / 5443	12,000 / 5443
Approx. Avg. Weight (lbs/kg)	2,500 / 1134	2,500 / 1134	2,500 / 1134
Overall Length – 16' (ft-in/mm)	21-4 / 6477	21-4 / 6477	21-4 / 6477
Overall Length – 18' (ft-in/mm)	23-4 / 7087	23-4 / 7087	23-4 / 7087
Deck Height (empty)(in/mm)	23.5 / 597	23.5 / 597	23.5 / 597
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591	8-6 / 2591
Load Width (in/mm)	82 / 2083	82 / 2083	82 / 2083
TONGUE			
Tongue Length (ft-in/mm)	4-0 / 1219	4-0 / 1219	4-0 / 1219
6-inch Channel Frame	S	S	S
Pintle Ring (2-bolt) (in)	3	3	3
High-Tensile Safety Chain	3/8" Grade 43	3/8" Grade 43	3/8" Grade 43
Top-Wind Parking Jack	7K	7K	7K
FRAME / RAMPS			
Main Beam	7" Channel	7" Channel	7" Channel
Crossmembers	3" Jr I-beam	3" Jr I-beam	3" Jr I-beam
Headboard Height (in / mm)	10 / 254	10 / 254	10 / 254
Deck Material	2" nom. Pine	2" nom. Pine	2" nom. Pine
Ramps (Ladder Style) Length x Width (ft-in x in/mm)	5-0x15 / 1524x381	5-0x15 / 1524x381	5-0x15 / 1524x381
Load Angle (degrees)	18	18	18
Ramp Hold-ups	Solid Bar	Solid Bar	Solid Bar
Tie Downs	Stake Pockets	Stake Pockets	Stake Pockets
Number of Tie-Downs (Total / Side)	6 / 3	6 / 3	6 / 3
SUSPENSION / TIRES			
Rubber-Ride Axles	S	S	S
Axle Capacity (each) (lbs/kg)	6,000 / 2721	6,000 / 2721	6,000 / 2721
Axle Spread (in/mm)	33 / 838	33 / 838	33 / 838
Hubs	Standard Lube	Standard Lube	Standard Lube
Electric Brakes	S	S	S
Brake Size (in/mm)	12x2 / 305x51	12x2 / 305x51	12x2 / 305x51
Battery Break-Away Kit with Tow Charger	S	S	S
Wheels (in/mm)	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152
Wheel Bolt Pattern	6-bolt	6-bolt	6-bolt
Tires / Load Range Rating	235/80R x 16 / E	235/80R x 16 / E	235/80R x 16 / E

Download these PDF specs to your smart phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>



*Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.