

TOWMASTER®

AMERICA'S BEST TRAILER



Description:

The Towmaster® T-24D heavy-duty drop-deck trailer is designed for hauling heavier mid-sized equipment. This model is built on a stout cold-formed I-beam tongue and main frame and features a 3-inch lip around the deck. The oak wood deck is supported by strong 3-inch I-beam crossmembers and 12K Dexter® Torflex® rubber torsion axles give it a smooth ride and the capacity it needs.

This trailer features a bolt-on parking jack, LED lights, sealed wiring harness, spring-assist ramps, and a solid bar ramp hold-up.

Quick Specs:

- 2" nominal white oak wood deck
- 27" deck height (empty)
- 82" between fenders
- 16', 18', or 20' deck
- 12K Dexter® Torflex® axles
- Electric brakes
- One-piece formed fender and inner panel
- Solid-bar ramp hold-ups
- Grommet mounted LED lights



Go to product web page.

Scan with your smart device.
Download app at
<http://gettag.mobi>



Shown with optional aluminum bolt-on fenders and other options.



Dexter's heavy-duty 12,000 lb. Torflex rubber-ride axles with oil-bath hubs provide a smooth ride.



Sealed battery break-away system charges while plugged into the tow vehicle and can be checked at the press of a button.



Spring-assist heavy-duty ramps are standard.

towmaster.com

800-462-4517

U.S.A. BUILT EMPLOYEE OWNED



GALVANIZING AVAILABLE




Photos may show optional equipment.

Drop-Deck
T-24D

T-24D

AMERICA'S BEST TRAILER

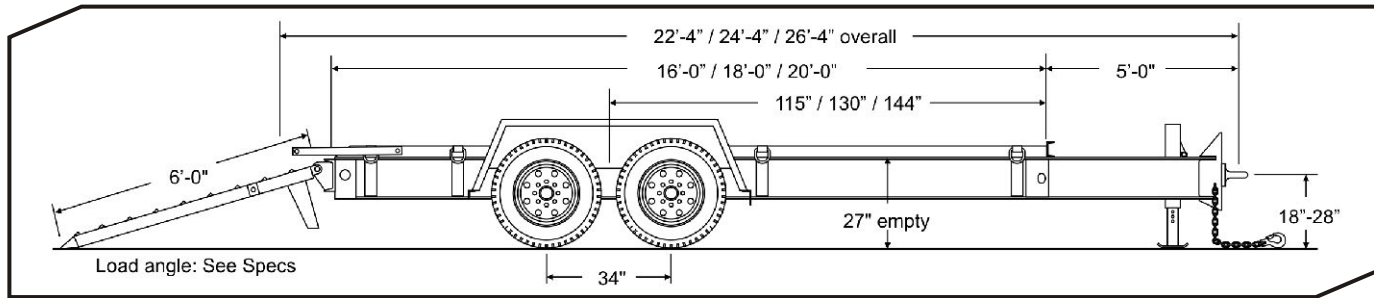

SPECIFICATIONS

S=Standard O=Optional

T-24D

CAPACITY / DIMENSIONS

Approx. Payload (lbs/kg)	24,000 / 10,886		
GVWR (lbs/kg)	28,700 / 13,018		
GAWR (lbs/kg)	24,000 / 10,886		
Approx. Avg. Weight (lbs/kg)	4,700 / 2132		
Overall Length – 16' (ft-in/mm)	22-4 / 6807		
Overall Length – 18' (ft-in/mm)	24-4 / 7417		
Overall Length – 20' (ft-in/mm)	26-4 / 8027		
Deck Height (empty)(in/mm)	27 / 686		
Overall Width (ft-in/mm)	8-6 / 2591		
Load Width (in/mm)	82 / 2083		

TONGUE

Tongue Length 5'-0" (1524mm)	S		
One-Piece Cold-Formed Tongue / Frame	S		
Pintle Ring (in)	3		
High-Tensile Safety Chain	1/2" Grade 70		
Bolt-on Drop-Leg Parking Jack	12K		

FRAME / RAMPS

Main Beam	High-Tensile W10		
Crossmembers	3" Jr I-beam		
Headboard Height (in / mm)	3 / 76		
Deck	2" nom. White Oak		
Deck Lip (in / mm)	2.5 / 64		
Ramps (Ladder Style) Length x Width (ft-in x in/mm)	6-0x18 / 1829x470		
Load Angle (degrees)	18		
Ramp Spring-Assist	S		
Ramp Hold-ups	Solid Bar		
Tie Downs	D-ring		
Number of Tie-Downs (Total / Side)	8 / 4		

SUSPENSION / TIRES

Rubber-Ride Axles w/Warranty	S		
Axle Capacity (each) (lbs/kg)	12,000 / 5443		
Axle Spread (in/mm)	34 / 864		
Hubs	Oil Bath		
Electric Brakes	S		
Brake Size (in/mm)	12.25x3.38 / 311x86		
Battery Break-Away Kit with Tow Charger	S		
Wheels (in/mm)	17.5x6.75 / 445x171		
Wheel Bolt Pattern	8-bolt		
Tires / Load Range Rating	235/75R x 17.5 / H		

STANDARD EQUIPMENT


- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Adjustable ramp width spacing
- RV electrical plug
- Trailer color: Equipment black
- Ramp color: Equipment red

OPTIONAL EQUIPMENT

Other options may be available
See your dealer or visit our web site for details

- 25K parking jack
- 2-5/16" ball coupler
- Gooseneck hitch
- 6-pole round electrical plug
- Storage tray lid
- Pallet fork holders
- 8K electric winch
- Additional tie-downs
- 3 ft. beavertail (comes with 5 ft. ramps)
- Spare tire and wheel mount
- Spare tire and wheel
- Replaceable aluminum fenders
- Tire upgrades available on select models
- Several ramp options available
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing

Download these PDF specs to your smart phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>



*Listed GVWR, weights, and dimensions are approximate and for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.