

# TOWMASTER®

## Hydraulic Dump T-9HD



Tri-swing rear gate opens to the side, down from the top, or swings open from the bottom.



Optional ladder-style ramps for loading equipment, stored above fender.



Built-in storage box houses hydraulic system with room for chains, straps or tools.

### Description:

The T-9HD trailer is a tandem-axle dump trailer designed for smaller jobs. It's great for the hauling needs of the light-duty general contractor, rental business, or landscaper. Several dump body sizes are available to haul dirt, sand, debris, or other materials. Towmaster's® T-9HD features a power-up/gravity-down hydraulic hoist, stake pockets, barn-door rear gate, and steel storage box for the hydraulic pump. Power from the vehicle is not required. Many options are available.

### Quick Specs:

- 25" deck height (empty)
- 82" wide box
- 10' or 12' dump body lengths
- Tarp securement rod
- Electric brakes
- Spring suspension
- Power up/gravity down twin cylinders
- Barn-door rear gate
- LED lights and sealed wiring

[towmaster.com](http://towmaster.com)

**800-462-4517**


**U.S.A. BUILT  
EMPLOYEE OWNED**



**GALVANIZING  
AVAILABLE**



Photos may show optional equipment.

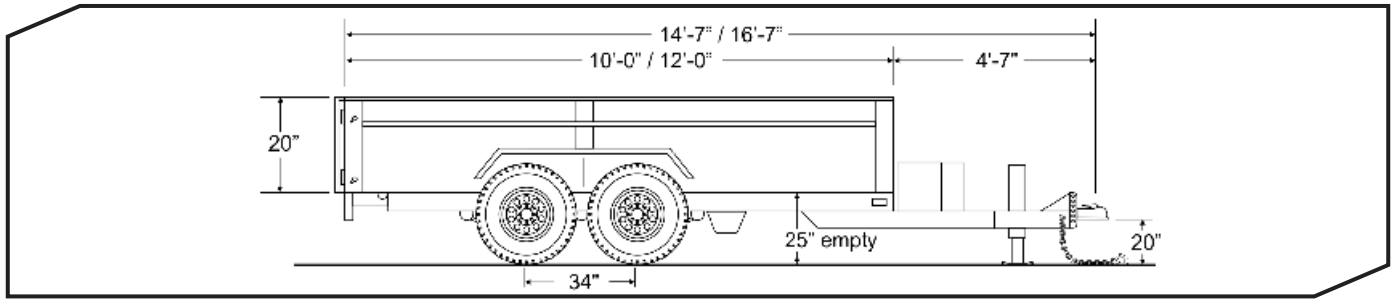

### SPECIFICATIONS

S=Standard O=Optional

T-9HD

#### CAPACITY / DIMENSIONS

*Payload Rating (starting at) (lbs/kg)	7,300 / 3311		
GVWR (lbs/kg)	9,990 / 4531		
GAWR (lbs/kg)	10,400 / 4717		
Weight (10'-0" / 3048) (lbs/kg)	2,600 / 1179		
Weight (12'-0" / 3658) (lbs/kg)	2,700 / 1225		
Deck Height (empty)(in/mm)	25 / 635		
Overall Width (ft-in/mm)	8-6 / 2591		
Load Width (in/mm)	82 / 2083		

#### TONGUE

Tongue Length (ft-in/mm)	4'-7" / 1397		
Ball Coupler (in)	2-5/16		
Safety Chain	3/8" Grade 43		
Bolt-on Top-Wind Parking Jack	5K		

#### FRAME / RAMPS

Main Frame	4x6 Tube		
Headboard Height (in / mm)	20 / 508		
Steel Cargo Box (height)(in / mm)	20 / 508		
11 ga. Steel Floor and Sides	S		
Ramps with Ramp Storage	S		
Scissor Hoist	S		
Power-Up / Gravity Down	S		
Dump Angle (degrees)	45		
Rear Gate	Barn Door		
Forged D-Rings (Total / Side)	2 / 4		
Stake Pockets (Total)	6		

#### SUSPENSION / TIRES

Spring Axle w/Warranty	S		
Axle Capacity (each) (lbs/kg)	5,200 / 2359		
Axle Spread (in/mm)	N/A		
Hubs	Greaseable		
Electric Brakes w/Forward Adjust	S		
Brake Size (in/mm)	12x2 / 305x51		
Battery Break-Away Kit with Tow Charger	S		
Wheels (in/mm)	15x6 / 381x152		
Wheel Bolt Pattern	8-bolt		
Tires / Load Range Rating	ST225/75R15 / D		

### STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- RV electrical plug
- Trailer color: Equipment black

### OPTIONAL EQUIPMENT Other options may be available. Ask your dealer or visit our web site.

- Hydraulic surge brakes
- Pintle ring
- 6-pole round electrical plug
- Hydraulic parking jack
- A-frame Gooseneck
- 24" sides
- Additional stake pockets
- Additional D-rings
- Roll tarp system
- Torsion axle upgrade
- Mud flaps
- Tri-Swing Gate
- Spare tire and wheel
- Spare tire mount
- Wireless remote
- Color options: Construction Yellow, Equipment Red, Blue, Charcoal
- Galvanizing

### U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.  
Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.