

TOWMASTER®

Option Bi-Fold Ramp



Easy as:



1 Simple operation. Lower ramp part way...



2 Raise tail section...



3 Finish lowering ramp for a low loading angle of approximately 9°.

Description:

Add the bi-fold ramp option to your deck over model. Ramp is full width (8'-6" wide) x 11' long. 6' beavertail at 8-degrees comes with this option for a smooth continuous load angle, along with the 9-degree incline on the bi-fold ramp. Super easy loading and unloading with low degree of incline.

Available on: • T-12 • T-50RG
• T-13 • T-70RG
T-40
T-50

Quick Specs:

- 6-ft beavertail at 8°
- 5-ft ramp at 9°
- Hydraulic operated
- Solid-bar ramp holdups
- White oak wood topped

26 ft. min. flat deck length required.

Photos may show optional equipment.

towmaster.com

800-462-4517

**U.S.A. BUILT
EMPLOYEE OWNED**




**GALVANIZING
AVAILABLE**





Bi-Fold Ramp

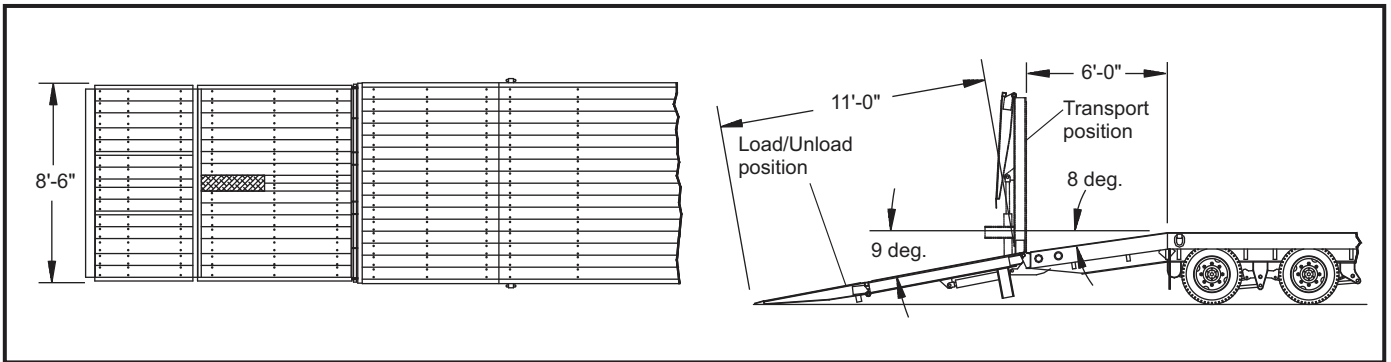

- AVAILABLE ON:**
- T-24
 - T-30
 - T-40
 - T-50
 - T-50RG
 - T-70RG

26 ft. min. flat deck length required.

STANDARD EQUIPMENT

- 6-ft beavertail at 8°
- 5-ft ramp at 9°
- Hydraulic operated
- Solid-bar ramp holdups
- White oak wood topped

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.
Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

www.towmaster.com

800-462-4517

©Towmaster, Inc. 11/2015