

## Hydraulic Ramps

Hydraulic ramps are controlled by an on-board electric over hydraulic pump. They are standard with a 5-ft. beavertail at 12-degrees and 3 ft. wide x 6 ft. long hydraulic ramps at 16-degree incline. This option may be added to almost any deck-over trailer with a capacity of 20,000 lbs. or more.



Solid-bar ramp holdups.



Easy to operate controls.



Wood-topped or steel cleat.

### Quick Specs:

- 5-ft. 12 ° beavertail
- 6-ft. 16 ° hydraulic ramps
- Electric over hydraulic operated

### Available on:

- T-20 • T-20LP • T-40 • T-40LP • T-50RG
- T-24 • T-24LP • T-50 • T-50LP • T-70RG
- T-30

22 ft. min. flat deck length required.

Photos may show optional equipment.


## AMERICA'S BEST BUILT TRAILERS FOR PROFESSIONAL HAULERS



**800-462-4517**  
TOWMASTER.COM



MORE MODELS • MORE OPTIONS • MORE CHOICES  
DROP-DECK • TILT BED • DECK-OVER • GOOSENECK • LOWBOY • HYDRAULIC TAIL

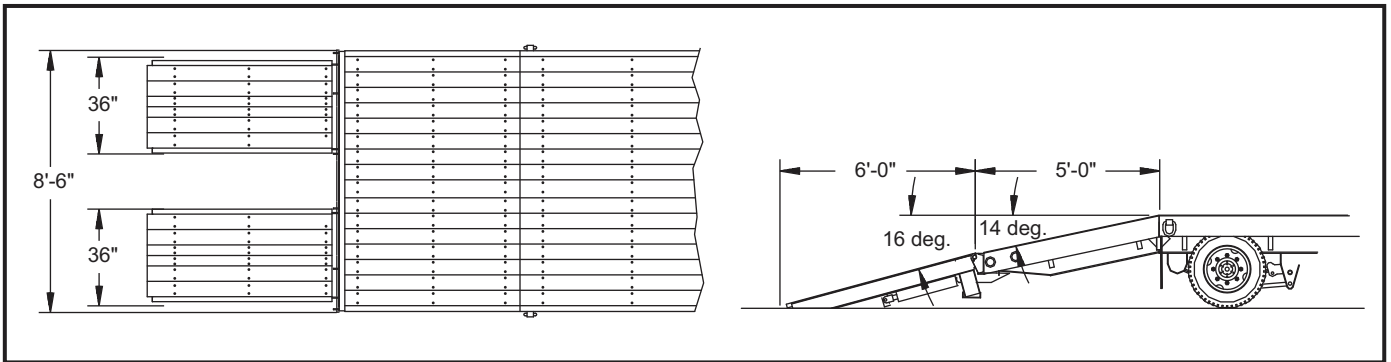

- AVAILABLE ON:**
- T-20
  - T-20LP
  - T-40
  - T-40LP
  - T-50RG
  - T-24
  - T-24LP
  - T-50
  - T-50LP
  - T-70RG
  - T-30

**22 ft. min. flat deck length required.**

## STANDARD EQUIPMENT

- 5-ft. 12° beavertail
- 6-ft. 16° hydraulic ramps
- Electric over hydraulic operated pump
- Choice of steel cleat or wood



\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight. Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.



towmaster.com  
**800-462-4517**  
 ©Monroe Towmaster, LLC - 0818