



Option A-Frame Gooseneck



Standard ball hitch.



Fifth-Wheel hitch option.



Inverted Fifth-Wheel hitch option.

Description:

Our A-Frame Gooseneck option allows more weight transfer to the tow vehicle for more capacity hauling. It features an 84" swing clearance with a standard height of 39". A ball coupler is standard, but fifth-wheel and inverted fifth-wheel couplers are optional. A built-in tool tray with lid completes the gooseneck.

Quick Specs:

- Ball coupler standard
- Tool tray with lid
- 84" swing clearance
- 39" coupler height
- Single parking jack

Available on:

- Drop-Deck models 9K and up
- Drop-Deck Tilt models 9K and up
- Hydraulic Dump models 5K and up
- Deck-Over models 9K-30K
- Deck-Over Tilt models 12K-30K
- Deck-Over Air Tilt models 24K

towmaster.com

800-462-4517

U.S.A. BUILT
EMPLOYEE OWNED




**GALVANIZING
AVAILABLE**



Photos may show optional equipment.

A-Frame Gooseneck

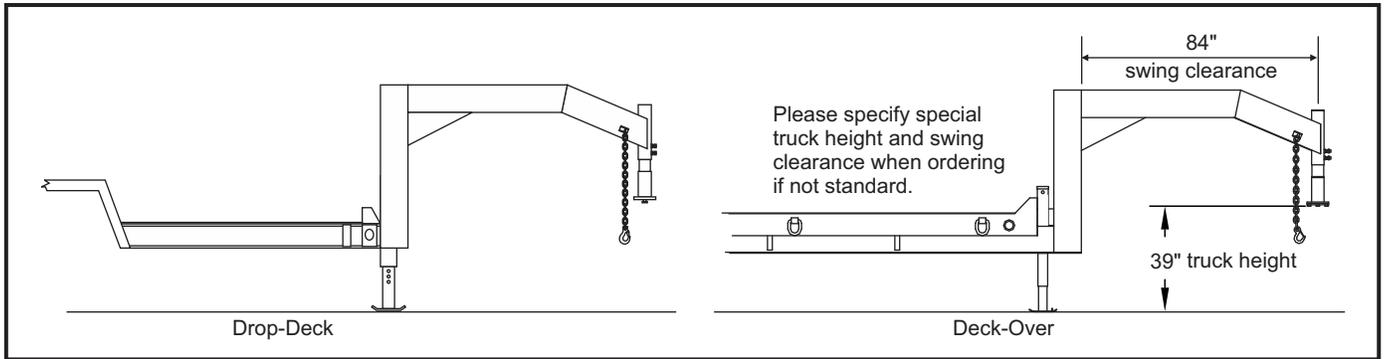

- AVAILABLE ON:**
- Drop-Deck models 9K and up
 - Drop-Deck Tilt models 9K and up
 - Hydraulic Dump models 5K and up

- Deck-Over models 9K-30K
- Deck-Over Tilt models 12K-30K
- Deck-Over Air Tilt models 24K

STANDARD EQUIPMENT

- Adjustable hitch height
- Single parking jack
- Weather resistant sealed modular wiring
- Registration holder
- Tool tray with lid
- Safety chains with hooks
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- RV electrical plug
- Color: Match trailer

OPTIONAL EQUIPMENT

- Swing clearance per customer spec
- Fifth-wheel coupler
- Inverted fifth-wheel coupler
- Gooseneck mounted winch
- Dual parking jacks

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.
Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.