

TOWMASTER®

Option Air Ramps



Easy operation.



Air actuators located under beavertail.



Ramp control levers through tailboard.

Description:

Air ramps are controlled by an on-board air tank. Releasing air lowers the ramps and filling the actuators raises the ramps. This is an economical way to add automatic ramp lifts to your trailer. Air ramps are 6 ft. long with a 16-degree incline. This option may be added to deck-over trailers with a capacity of 20,000 lbs. or more, equipped with air brakes.

Quick Specs:

- 5-ft. 12° beavertail
- 6-ft. 16° hydraulic ramps
- Hydraulic operated

Available on: • T-20 • T-20LP • T-40 • T-40LP • T-50RG
• T-24 • T-24LP • T-50 • T-50LP • T-70RG

Air-brake trailers only!

22 ft. min. flat deck length required.

Photos may show optional equipment.

towmaster.com


800-462-4517

**U.S.A. BUILT
EMPLOYEE OWNED**



**GALVANIZING
AVAILABLE**



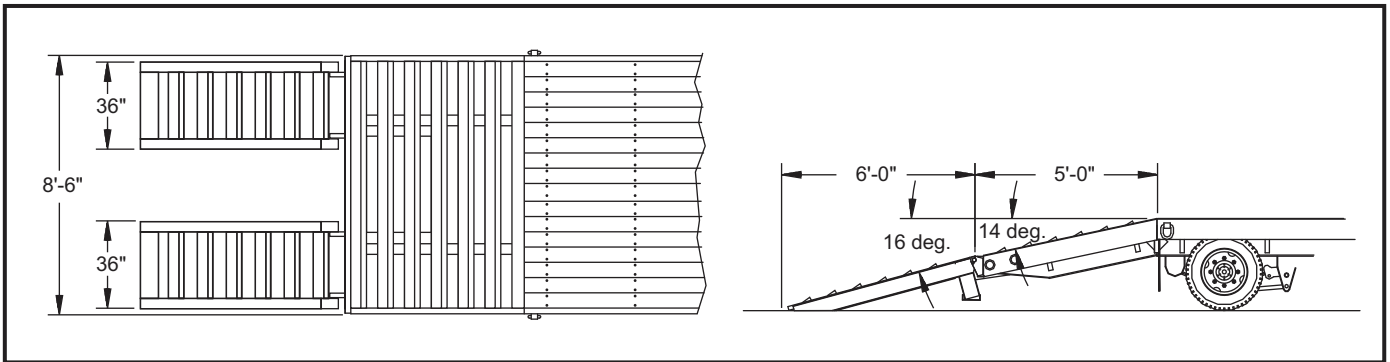

AVAILABLE ON: • T-20 • T-20LP • T-40 • T-40LP • T-50RG
 • T-24 • T-24LP • T-50 • T-50LP • T-70RG

Air-brake trailers only!

22 ft. min. flat deck length required.

STANDARD EQUIPMENT

- 5-ft. 14° beavertail
- 6-ft. 16° hydraulic ramps
- Air actuated
- Choice of steel cleat or wood