



Option Hydraulic Ramps



Solid-bar ramp holdups.



Easy to operate controls.



Wood-topped or steel cleat.

Description:

Hydraulic ramps are controlled by an on-board hydraulic pump with fluid from the tow vehicle. They are standard with a 5-ft. beavertail at 12-degrees and 3 ft. wide x 6 ft. long hydraulic ramps at 16-degree incline. This option may be added to almost any deck-over trailer with a capacity of 20,000 lbs. or more.

Quick Specs:

- 5-ft. 12° beavertail
- 6-ft. 16° hydraulic ramps
- Hydraulic operated

- Available on:
- T-20
 - T-20LP
 - T-40
 - T-40LP
 - T-50RG
 - T-24
 - T-24LP
 - T-50
 - T-50LP
 - T-70RG
 - T-30

22 ft. min. flat deck length required.

Photos may show optional equipment.

towmaster.com

800-462-4517

**U.S.A. BUILT
EMPLOYEE OWNED**




**GALVANIZING
AVAILABLE**





Hydraulic Ramps

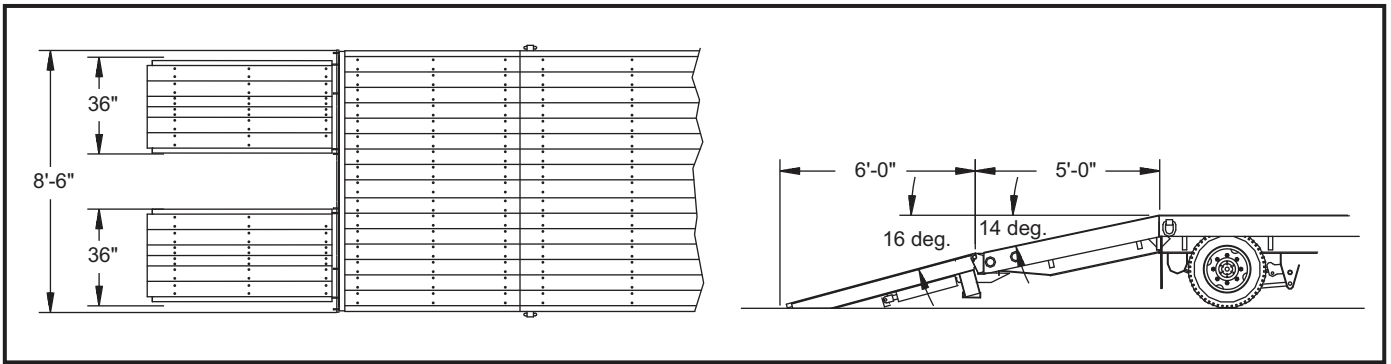

AVAILABLE ON: • T-20 • T-20LP • T-40 • T-40LP • T-50RG
• T-24 • T-24LP • T-50 • T-50LP • T-70RG
• T-30

22 ft. min. flat deck length required.

STANDARD EQUIPMENT

- 5-ft. 12° beavertail
- 6-ft. 16° hydraulic ramps
- Hydraulic operated
- Choice of steel cleat or wood

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.
Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

www.towmaster.com

800-462-4517

©Towmaster, Inc. 11/2015