

# TOWMASTER®

## Deck-Over Tilt T-30T / T-40T



Patented automatic kick-out ramp doubles as under-ride protection.



Cushion cylinder controls the deck from slamming when loading or unloading equipment.



Standard 4-foot stationary deck gives room for longer equipment and makes towing easier.

### Description:

The Towmaster® deck-over tilt trailers offer convenience and durability. There are no ramps to hassle with, simply tilt the deck, drive on or off and level the deck back down. It features our patented automatic kick-out ramp that doubles as an under-ride protection bumper. The tilt deck trailer features a single-lever twin-latch system, stationary forward deck, Hutchens® suspension and adjustable hitch. A deck cushion cylinder eases the deck back into transport position and prevents equipment from slamming the deck down.

### Quick Specs:

- 36" deck height (empty)
- 8'-6" deck width
- Tilt deck cushion cylinder
- Elec. brakes (T-30T)/Air brakes (T-40T)
- Hutchens® suspension
- Auto kick-out ramp/under-ride protection
- Single-lever twin-latch locking system
- LED lights and sealed wiring

[towmaster.com](http://towmaster.com)

**800-462-4517**


**U.S.A. BUILT  
EMPLOYEE OWNED**



**GALVANIZING  
AVAILABLE**



Photos may show optional equipment.

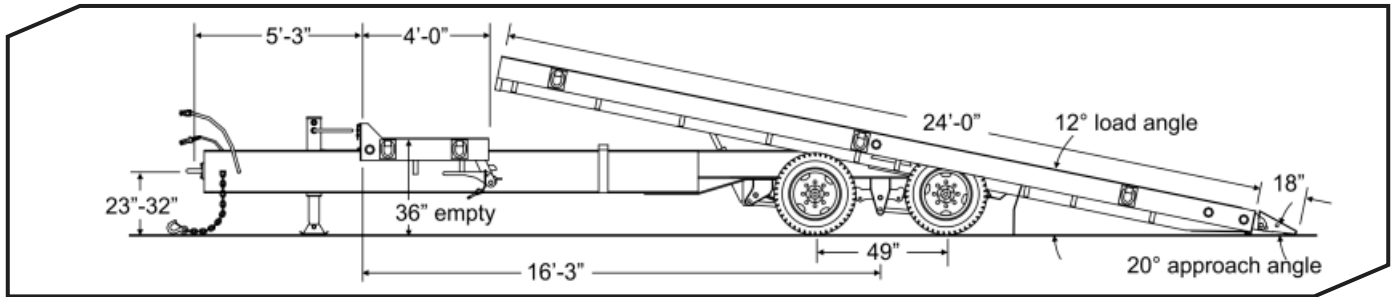

### SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	T-30T	T-40T		
	Payload Rating (lbs/kg)	30,000 / 13,608	40,000 / 18,144	
GVWR (lbs/kg)	39,800 / 18,053	50,500 / 22,906		
GAWR (lbs/kg)	30,000 / 13,608	45,000 / 20,411		
Approx. Avg. Weight (lbs/kg)	9,800 / 4,445	10,500 / 4,763		
Overall Length (ft-in/mm)	34-0 / 10,363	34-0 / 10,363		
Deck Height (empty)(in/mm)	36 / 914	36 / 914		
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591		
<b>TONGUE</b>				
Tongue Length 5'-2" (1575mm)	S	S		
Storage Tray with Lid	S	S		
Pintle Ring (in)	3	3		
High-Tensile Safety Chain	1/2" Grade 70	1/2" Grade 80		
Bolt-on Two-Speed Parking Jack	25K	25K		
<b>FRAME / RAMPS</b>				
Main Beam	W16x26, Gr.50	W16x26, Gr.50		
One-Piece Cold-Formed Frame Rails	S	S		
Side Rails (in x in x in)	8x2x1/4 Tubing	8x2x1/4 Tubing		
Crossmembers	3" Jr I-beam	3" Jr I-beam		
Headboard Height (in/mm)	5.5 / 140	5.5 / 140		
Deck Length (ft/mm)	24+4 / 7315+1219	24+4 / 7315+1219		
Deck Material	2" nom. White Oak	2" nom. White Oak		
Deck Cushion Cylinder	S	S		
Deck Latch	Dual-Point	Dual-Point		
Approach Ramp (in x in/mm)	18 / 457	18 / 457		
Load Angle (degrees) – depending on deck length	10	10		
D-Ring Tie Downs (Total/Side)	10 / 5	10 / 5		
<b>SUSPENSION / TIRES</b>				
Adjustable Hutch 9700 Spring Suspension	S	S		
No. of Axles	2	2		
Axle Capacity (each) (lbs/kg)	15,000 / 6804	22,500 / 10,206		
Axle Spread (in/mm)	49 / 1245	49 / 1245		
Hubs	Oil Bath	Oil Bath		
Brake Size (in/mm)	12.25x7.5 / 311x191	12.25x7.5 / 311x191		
Air Brakes (Full ABS Modulated, Park Brake All Axles)	N/A	S		
Electric Brakes	S	N/A		
Hub Piloted Budd Wheels (in/mm)	17.5x6.75 / 445x171	17.5x6.75 / 445x171		
Wheel Bolt Pattern	8-bolt	8-bolt		
Tires / Load Range Rating	215/75R17.5 / H	235/75R17.5 / H		

### STANDARD EQUIPMENT

- Adjustable hitch height
- 7-pole round electrical plug
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Equipment black

### OPTIONAL EQUIPMENT Other options may be available. Ask your dealer or visit our web site.

- Rigid Gooseneck
- Dual parking jacks
- Additional stationary deck length
- Additional tie-downs
- Spare tire and wheel mount
- Spare tire and wheel
- Tire upgrade (235/75R17.5)
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing

### U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.