

# TOWMASTER®

Jeep  
T-80J



Shown with optional equipment



41" sliding adjustable fifth wheel.



Heavy-duty main frame with conveniently located air and electrical connectors.



Air ride suspension.

## Description:

The T-80J Jeep is designed to be used with our detachable gooseneck trailer, but also with other brands of lowboys on the market. It features a sliding adjustable fifth wheel hitch, air-ride suspension, telescoping pin-type parking stands, and automatic slack adjusters. We offer many options to customize the Jeep to fit your needs. Built by Towmaster®, you're sure to get the quality you expect.

## Quick Specs:

- 41" sliding adjustable fifth wheel
- Telescoping pin-type parking stands
- 8'-0" width
- Air brakes
- Air suspension
- Automatic slack adjusters
- Park brake on all axles
- LED lights and sealed wiring

[towmaster.com](http://towmaster.com)

800-462-4517


U.S.A. BUILT

Photos may show optional equipment.



**GALVANIZING  
AVAILABLE**



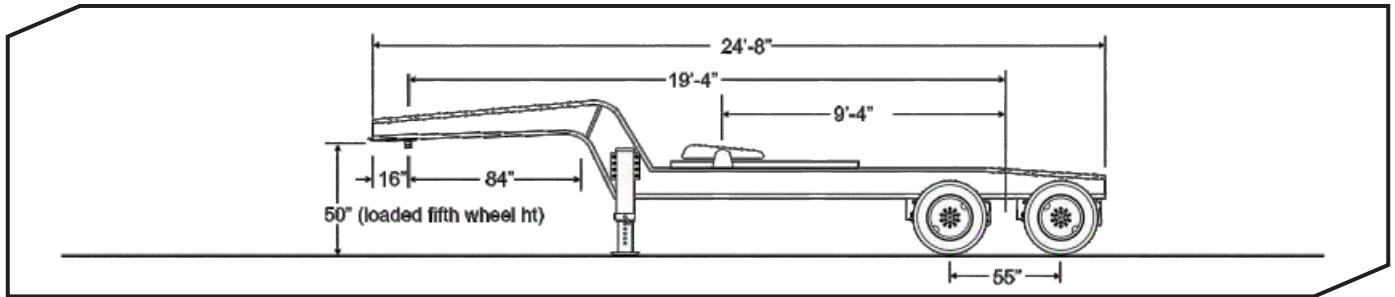

CAPACITY / DIMENSIONS		T-80J	
Capacity Rating (lbs/kg)	80,000 / 36,287		
Approx. Weight (lbs/kg)	7,500 / 3402		
GVWR (lbs/kg)	95,000 / 43,091		
GAWR (lbs/kg)	50,000 / 22,680		
Fifth Wheel Height (fully loaded)(in/mm)	50 / 1270		
Hitch to Axle Spread Length (ft-in/mm)	19-4 / 5893		
Max Fifth Wheel to Axle Spread (ft-in/mm)	9-4 / 2845		
Overall Width (ft-in/mm)	8-0 / 2438		
Overall Length (ft-in/mm)	24-8 / 7518		
FRAME			
Swing Clearance (in/mm)	84 / 2134		
King Pin Setting (in/mm)	16 / 406		
Main Beam (T1 Flange) (in)	15 Fabricated		
Fifth-Wheel Slide (in/mm)	41 / 1041		
No. of Parking Jacks (capacity)	2 / 25K		
Parking Jack Type	Telescoping Pin-Type		
SUSPENSION / TIRES			
Air Suspension	S		
Axles (number of axles)	2		
Axle Spread (in/mm)	55 / 1397		
Axle Capacity (each) (lbs/kg)	25,000 / 11,340		
Forged Alloy Spindles	S		
Oil Bath Hubs	S		
Air Brakes	S		
Brake Size (in/mm)	16.5x7 / 419x178		
22.5x8.25 Wheels	S		
Wheels Hub Piloted	S		
Wheel Bolt Pattern	10-bolt		
Tire Size (all Load Range Rating H)	255/70R x 22.5		
Poly Mud Flaps	S		

### STANDARD EQUIPMENT

- S.A.E. 2" King Pin set at 16"
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Equipment black

### OPTIONAL EQUIPMENT

Other options may be available. Ask your dealer or visit our web site.

- Longer swing-clearance lengths
- Gooseneck fenders
- Aluminum toolbox
- Chain/storage tray in gooseneck
- Lockable lid for storage tray
- 8'-6" and 9'-0" width options
- Flag holders
- Raise/lower kit
- Manual ride height control valve
- Aluminum wheels
- Tire equalization options
- Color options: Construction Yellow, Equipment Red, Blue, Charcoal

### U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.